



Stainless Steel 316L / 1.4404

Alternative Designations

X2CrNiMo17-12-2

Key Features

Stiffness • Corrosion resistance • High ductility and toughness • Properties can be enhanced with heat-treatment

Product Description

EOS StainlessSteel 316L is a high-performance, marine-grade austenitic stainless steel alloyed with molybdenum for enhanced corrosion resistance in chloride environments. It offers high ductility, toughness, and strength, making it suitable for various applications in the chemical industry, food processing, medical devices, and more. This material is widely used in process, energy, paper, and transportation industries due to its superior properties.

Properties*

Yield strength (xy/z)	540 / 480 MPa
Tensile strength (xy/z)	645 / 560 MPa
Elongation at break (xy/z)	38 / 49%
Coefficient of thermal expansion (25-100 °C)	15.72 *10 ⁻⁶ /K
Density	7.97 g/cm ³
Hardness	90 HRB
Corrosion resistance	5/5

*As manufactured, 20 µm layer thickness

Stainless Steel 316L / 1.4404

Applications

Engineering


Machine building

Medicine, dentistry

Consumer goods

Maritime

End-use parts

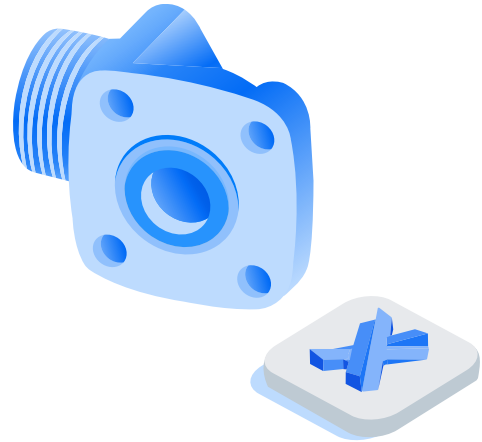

Chemical Composition

Fe	Balance
Cr	17 - 19
Ni	13 - 15
Mo	2.25 - 3
C	0.03
N	0.10

Reference

For more detailed source information, please consult the original document linked [here](#). We encourage users to verify the data's relevance and suitability for their specific needs.